ND8110HSE-4-50





#### **FEATURES**

- Transmits 1 HDMI video and audio signals up to 50M over a single CAT6 cable;
- Support video resolution up to 1920\*1080@60Hz, 3D signal;
- Transform one channel HDMI input to 4 channel Cat6 signal output
- Support EDID copy function, can match many kinds of display device;
- Support bidirectional 20-60KHz IR;
- Support POC function;
- Compliance with HDMI 1.3 and HDCP 1.2 standard
- High compatibility, can auto-match source and display device
- Built-in automatic adjustment system, make the image smooth, clear and stable;
- Built-in ESD protection system;
- Easy to install, plug and play;

Newbridge<sup>®</sup> The HDMI extender provides extension of HDMI signals long distances over a single CAT6 cable, transform one channel input to 4 channels output, it supports high resolution up to 1080p and Support bidirectional 20-60KHz IR. The extender can use for a wide range of applications requiring long distance transmission of high resolution with high quality by its good stability and powerful security.



#### ND8110HSE-4-50

### **Specifications**


	Parameter	Description			
	Standards	HDMI 1.3; HDCP 1.2			
	Maximum pixel clock	165MHz			
	Maximum data rate	6.75Gbps			
Video	Resolution	Max 1920X1080@60Hz			
	Connector	HDMI-A			
	Impedance	100Ω			
	Interface	3.5mm earphone seat			
IR	Signal direction	bidirectional direction			
IR	Signal type	Digital			
	IR frequency	20-60KHz			
	Interface	RJ45			
Ethernet	Transmission distance	CAT650M			
	Power supply	The power adapter: DC 12V/1A			
Other	Power dissipation	MAX 8W			
	Temperature	Operating: $-5^{\circ}$ C ~ +70 $^{\circ}$ C			
	Humidity	Operating: 5% ~ 90%			
	Dimension	TX:150*71*23mm/RX:81*45*23			
	The warranty	1 year free warranty			




#### ND8110HSE-4-50

#### Panel

#### Transmitter:

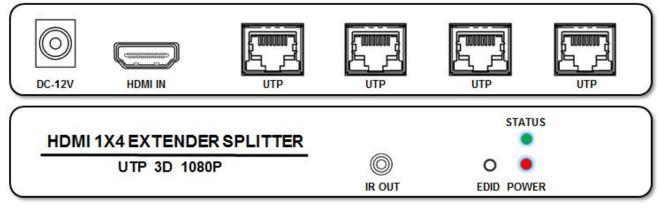

**Receiver:** 



Port name	Description	
HDMI IN/ HDMI OUT	HDMI OUT HDMI signal input/ output	
IR IN / IR OUT	R signal input/output	
UTP	RJ45 port connect cat6	
EDID	send the INPUT at the TV access, long press EDID button for 3 seconds, status indicator light flashing, completed copy EDID.	
EQ	EQ automatic adjust. When the video is not clear or unstable, it can be adjusted automatically through the EQ button	
DC 12V	Power adapter socket	
LED indicator	Description	
STATUS/ STA	Video signal indicator	
POWER/ PWR	System power indicator	



R

### ND8110HSE-4-50

#### Application



**Order Information** 

Part No	Description of product				Unit		
ND8110HSE-4-50	HDMI	1*4+4	Splitter	Extender,50m,HDMI	1.3;	HDCP	pair
ND0110H3E-4-30	1.2,12V	/1A/DC,	up to 1920	)*1080/60Hz			



R

ND8110HSE-4-50





Shenzhen Newbridge Communication Equipment CO.,LTD.